

IDROPAVESE®

IDROPULITRICI DAL 1982




EK

GENERATORI MOBILI D'ARIA CALDA A CORRENTE ELETTRICA

ELECTRICAL MOBILE SPACE HEATERS

EK - GENERATORI MOBILI D'ARIA CALDA A CORRENTE ELETTRICA

- Resistenze elettriche corazzate AISI 321 avvolte a profilo ad alto scambio termico
- Termostato ambiente incorporato
- Selettore di potenza
- Cavo alimentazione elettrica (1,5 m) con spina (EK 3)
- Termostato di sicurezza a riarmo manuale
- Griglia anteriore in acciaio inox
- Canalizzabile fino a 6 m (EK 10, EK 15, EK 22, EK 30)
- Possibilità di impilamento
- Presa termostato esterno (EK 30)
- Extra strength elements AISI 321 for high performance
- Built-in room thermostat
- Selector switch
- Power cord (1,5 m) with plug (EK 3)
- Safety thermostat with manual reset
- Stainless steel front grid
- Duct able up to 6 m long (EK 10, EK 15, EK 22, EK 30)
- Possibility to stack-ability
- Set to be connected to an external thermostat (EK 30)

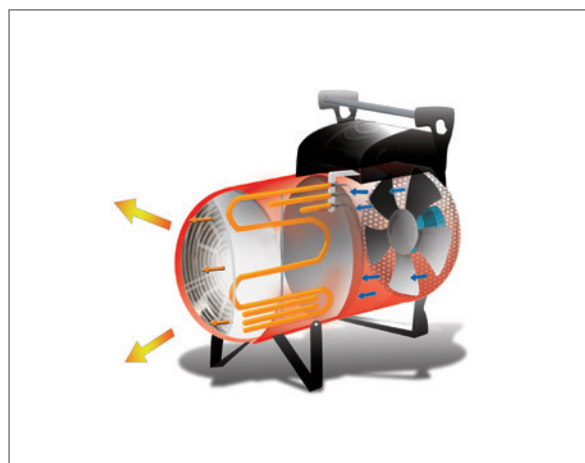

ACCESSORI A RICHIESTA / ACCESSORIES ON DEMAND

TERMOSTATO AMBIENTE +5/+30°C CON CAVO L=10 m E SPINA 90° ROOM THERMOSTAT +5/+30°C CABLE 10 m, PLUG 90°	TERMOSTATO AGRICOLTURA/CANTIERE -5/+50°C CON CAVO L=10 m E SPINA 90° HEAVY DUTY THERM. -5/+50°C CABLE 10 m, PLUG 90°	SPINA 4-5 POLI 4-5 PIN PLUG
		
Mod. EK 30 Cod. 02AC581	Mod. EK 30 Cod. 02AC582	Mod. 3P+⏏ EK 10 Cod. 06AC102 16A
		Mod. 3P+⏏ EK 15 / EK 22 Cod. 06AC103 32A
		Mod. 3P+⏏+N EK 10 Cod. 06AC104 16A
		Mod. 3P+⏏+N EK 15 / EK 22 Cod. 06AC105 32A
		Mod. 3P+⏏+N EK 30 Cod. 06AC108 64A
ADATTATORE GUAINA DUCT ADAPTER	GUAINA FLESSIBILE IN PVC l= 6 m CON CINGHIA DI FISSAGGIO FLEXIBLE AIR DUCT 6 m LONG WITH CLIP	KIT CARRELLO TROLLEY KIT
		
Mod. EK 10 - EK 15 (Ø 300 mm) Cod. 06AC101	Mod. EK 10 - EK 15 (Ø 300 mm) Cod. 02AC562	Mod. EK 10 - EK 15 Cod. 03AC501
Mod. EK 22 (Ø 350 mm) Cod. 06AC106	Mod. EK 22 (Ø 350 mm) Cod. 02AC563	
Mod. EK 30 (Ø 500 mm) Cod. 06AC107	Mod. EK 30 (Ø 500 mm) Cod. 02AC566	Mod. EK 22 Cod. 03AC502

EK - GENERATORI MOBILI D'ARIA CALDA A CORRENTE ELETTRICA
ELECTRICAL MOBILE SPACE HEATERS

PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE					IMBALLO PACKAGING			
MOD	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
EK 3 C	367	180	280	5	392	277	217	6
EK 10 C	505	277	511	13	542	387	315	14
EK 15 C	575	277	511	15	610	387	315	16
EK 22 C	700	317	538	21	732	432	350	22
EK 30 C	795	540	706	38	845	595	670	45

A

B

C

H

X

Y

		EK 3 C	EK 10 C	EK 15 C	EK 22 C	EK 30 C
codice - code		06EK101	06EK102	06EK103	06EK104	06EK105
potenza term. nominale max max rated heat power	Hs [kW] Hs [kcal/h - BTU/h]	3 2.580 - 10.235	10 8.600 - 34.120	15 12.900 - 51.185	22 18.915 - 75.065	30 25.818 - 102.455
potenza term. nominale min. min rated heat power	Hs [kW] Hs [kcal/h - BTU/h]	1,5 1.290 - 5.185	6,6 5.675 - 22.520	10 8.600 - 34.120	15 12.900 - 51.185	20 17.212 - 68.304
rendimento - heat efficiency	[%]	100	100	100	100	100
portata d'aria - air flow	[m³/h]	450	1.500	2.000	3.050	3.900
salto termico - temperature rise	a 20°C [°C]	44,5 - 32	48,3 - 30,5	54,3 - 35	56 - 38	56 - 38
corrente massima - current max	[A]	13 - 6,5	13,6 - 7,1	21 - 13,8	30 - 21	43 - 28
alimentazione elettrica - electrical power	[V - ph - Hz]	230 - 1 - 50	400 - 3 - 50	400 - 3 - 50	400 - 3 - 50	400 - 3 - 50/60
connessioni - connection	[n°]	-	3P+⏚ 3P+⏚+N	3P+⏚ 3P+⏚+N	3P+⏚ 3P+⏚+N	3P+⏚+N
quantità per pallet - pallet quantities	[pz - pcs]	72	36	24	18	6

Possibilità di impilamento (EK 10-15-22-30)
Possibility to stack-ability (EK 10-15-22-30)